

Distance-2 Edge Coloring is NP-Complete

Jeff Erickson Shripad Thite David Bunde
{jeffe,thite,bunde}@uiuc.edu

DRAFT—March 1, 2002

Let G be a simple, undirected graph. We say that two edges of G are within distance 2 of each other if either they are adjacent or there is some other edge that is adjacent to both of them.

A *distance-2-edge-coloring* of G is an assignment of colors to edges so that any two edges within distance 2 of each other have distinct colors, or equivalently, a vertex-coloring of the square of the line graph of G . If the coloring uses only k colors, it is called a *k -D2-edge-coloring*, and the graph G is said to be *k -D2-edge-colorable*. Any k -D2-edge-colorable graph is also $(k + 1)$ -D2-edge-colorable.

Theorem 1. *Determining whether a bipartite graph with girth 6 and maximum degree 3 is 5-D2-edge-colorable is NP-complete.*

Proof: The problem is clearly in NP since a coloring can be verified in polynomial time. To prove NP-hardness, we describe a reduction from NOT-ALL-EQUAL-3SAT [1, Problem LO3].

INSTANCE: A set $X = \{x_1, x_2, \dots, x_n\}$ of variables, and a collection $C = \{C_1, C_2, \dots, C_m\}$ of boolean clauses over X , each with exactly three literals.

QUESTION: Is there a truth assignment for X such that each clause in C has at least one true literal and at least one false literal?

Given an instance (X, C) of NOT-ALL-EQUAL-3SAT, we will reduce it to a graph $G(X, C)$ that has a 5-D2-edge-coloring (hereafter, a *valid coloring*) if and only if (X, C) has a satisfying assignment. We will label the five colors $\{T, F, 1, 2, 3\}$, where T and F represent the boolean values TRUE and FALSE.

Our reduction uses three types of gadgets, all illustrated in Figure 1.

- **Fanout gadget:** This extendible gadget has a valid coloring with five colors such that the output edges have the same color as the input edges, regardless of which two colors are used on the two edges adjacent to the output edge. In fact, all marked edges in the figure are required to be the same color. Our reduction uses $2n + 2$ fanout gadgets: a *truth* gadget, a *falsehood* gadget, and two *literal* gadgets for each variable in X . Without loss of generality, the output edges of the truth gadget are colored T , and the output edges of the falsehood gadget are colored F .
- **Variable gadget:** This gadget has two input edges, three internal edges, and two output edges. One input edge is connected to the truth gadget, the other connected to the falsehood gadget. (Thus, the truth and falsehood gadgets must output different colors.) The output

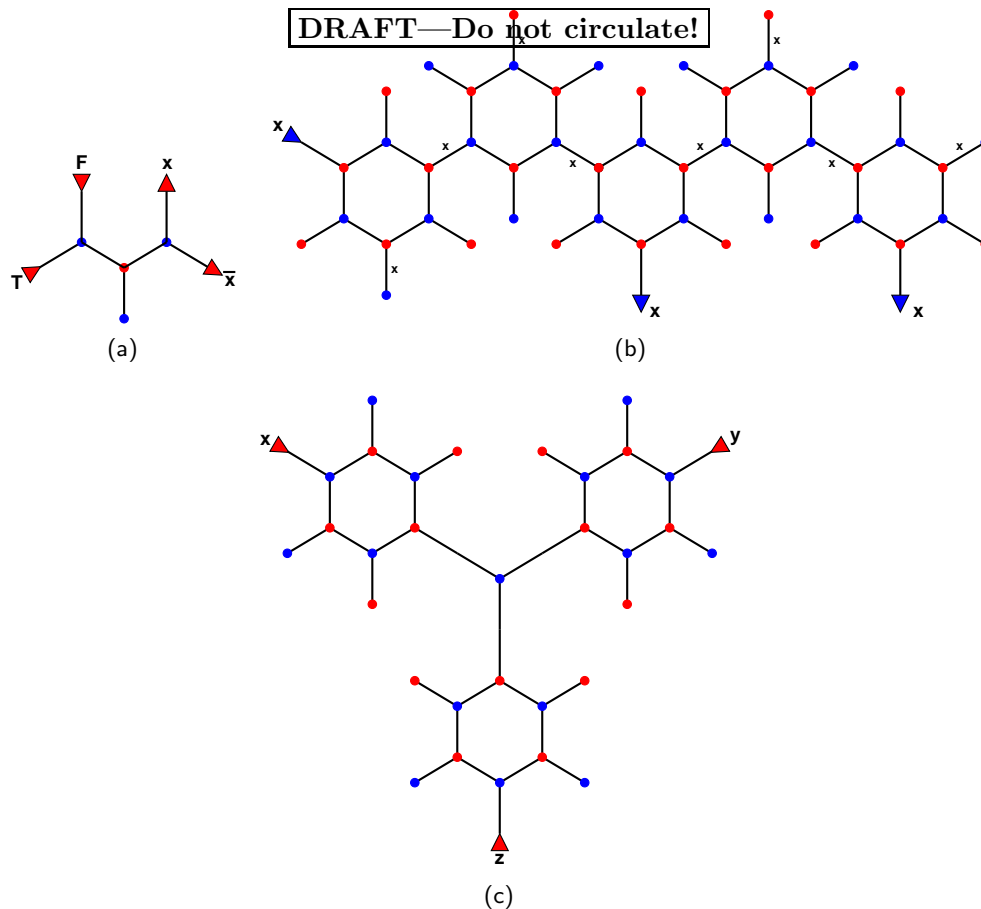


Figure 1: (a) A variable gadget. (b) A fanout gadget. (c) A clause gadget. Triangles indicate input and output edges.

edges are colored T and F in any valid coloring, but either assignment of colors is possible. Each output is connected to one of the literal fanout gadgets. The reduction uses n variable gadgets, one for each variable in X .

- **Clause gadget:** This gadget has three input edges, each connected to an output edge of the appropriate literal gadget. The clause gadget has a valid coloring if and only if the three input edges are *not* all the same color. The reduction uses m clause gadgets, one for each clause in C .

Overall, our graph $G(X, C)$ has complexity $O(n + m)$ vertices and edges, and we can easily construct it in linear time. The graph is bipartite because its vertices can be consistently colored with two colors, red and blue, as shown in Figure 1. The graph has girth 6 and maximum degree 3. It is easy to show that the graph is also 2-inductive. Any satisfying assignment for (X, C) can be transformed into a valid coloring for $G(X, C)$, and vice versa, in $O(n + m)$ time. \square

References

DRAFT—Do not circulate!

- [1] Michael R. Garey and David S. Johnson. *Computers and Intractability: A Guide to the Theory of NP-Completeness*. W. H. Freeman and Co., 1979.